

UNCLASSIFIED 10/80

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)	
(14) REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
WHOI-80-41	3. RECIPIENT'S CATALOG NUMBER
AD TION SUBMINE	5. TYPE OF REPORT & PERIOD COVERED
A COMPILATION OF MOORED CURRENT METER DATA, WHITE HORSE PROFILES AND ASSOCIATED OCEANOGRAPHIC	Technical reply
OBSERVATIONS VOLUME XXIV (INDIAN OCEAN ARRAY)	8. PERFORMING ORG. REPORT NUMBER
7. AL THOR(s)	S. SONTRACT OR GRANT NUMBER
Ann/Spencer, Kathleen/O'Neill and James R./Luyter	N00014-76-C-0197, NSF- ATM76-02196, ATM78-21491.
	DES7Z-01384
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Woods Hole Oceanographic Institution Woods Hole, MA 02543	NR 083-400
11. CONTROLLING OFFICE NAME AND ADDRESS	October 1080
NORDA National Space Technology Laboratory	13. NUMBER OF PAGES
Ray St Louis MS 39529 14. MONITORING AGENCY NAME & ADDRESS(II different from Controlling Office)	15. SECURITY CLASS. (of this report)
1	Unclassified
(12) 58	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)	
Approved for public release; distribution unlimit	ed.
·	
17. DISTRIBUTION STATEMENT (of the abelract entered in Block 20, if different from	n Report)
18. SUPPLEMENTARY NOTES	
Microfiche copy is enclosed in the pocket of the	hack cover
The offene copy is enerosed in the pookes of the	Duck Covert
19. KEY WORDS (Cantinue on reverse side if necessary and identify by block number) 1. Ocean currents	
1. Ocean currents 2. Ocean temperatures	
3. Indian Ocean	
20. ABSTRACT (Continue on reverse side it necessary and identify by block number)	
See back	
	•
	• .

DD 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE V UNCLASSIFIED 10/80
S/N 0102-014-6601 | SECURITY CLASSIFICATION OF THIS PAGE (When Date

LCURITY CLASSIFICATION OF THIS PAGE(When Date Entered)

dea (dea) Current and temperature measurements are presented from instruments deployed during May of 1976 in the western Indian Ocean, between 50 E and 57 E and between 1/S and 5 N. The experiment was part of the INDEX program.

(deg


Seven mooring sites were occupied. Fourteen current meters and five temperature/pressure recorders were on WHOI moorings at 4 of the sites. Two current meters and eleven temperature/pressure recorders were on MIT moorings at 3 sites. Most of resulting data records are of eight months duration. A current profiler, the White Horse, was also used, and 41 profiles were taken over a six-week period.

Basic data from the current meters are presented in statistical tables and graphically as scatter plots, progressive vector plots, spectral plots and time series plots. Filtered time series are shown in composite displays.

Basic White Horse data are presented as east and north current compon-

ent profiles, position plots and perspective vector plots.

Selected CTD data are displayed as plots of potential temperature and salinity versus pressure, and as T-S diagrams. Data from four XBT sections are displayed graphically.

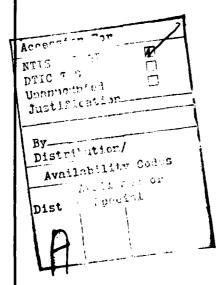

A COMPILATION OF MOORED CURRENT METER DATA,
WHITE HORSE PROFILES AND ASSOCIATED OCEANOGRAPHIC OBSERVATIONS,
VOLUME XXIV (INDIAN OCEAN ARRAY, 1976)

by

Ann Spencer, Kathleen O'Neill and James R. Luyten

WOODS HOLE OCEANOGRAPHIC INSTITUTION Woods Hole, Massachusetts 02543

October 1980

TECHNICAL REPORT

Prepared for the Ocean Science and Technology Division of the Office of Naval Research under Contract NO0014-76-C-0197; NR 083-400 and for the National Science Foundation under Grants ATM76-02196, ATM78-21491, and DES72-01384.

Reproduction in whole or in part is permitted for any purpose of the United States Government. This report should be cited as: Woods Hole Oceanographic Institution Technical Report WHOI-80-41.

Approved for public release; distribution unlimited.

Approved for Distribution

Valentine Worthington, Chairman Department of Physical Oceanography

ABSTRACT

Current and temperature measurements are presented from instruments deployed during May of 1976 in the western Indian Ocean, between 50°E and 57°E and between 1°S and 5°N . The

experiment was part of the INDEX program.

Seven mooring sites were occupied. Fourteen current meters and five temperature/pressure recorders were on WHOI moorings at 4 of the sites. Two current meters and eleven temperature/pressure recorders were on MIT moorings at 3 sites. Most of the resulting data records are of eight months duration. A current profiler, the White Horse, was also used, and 41 profiles were taken over a six-week period.

Basic data from the current meters are presented in statistical tables and graphically as scatter plots, progressive vector plots, spectral plots and time series plots. Filtered time series are shown in composite displays.


Basic White Horse data are presented as east and north current component profiles, position plots and perspective


vector plots.


Selected CTD data are displayed as plots of potential temperature and salinity versus pressure, and as T-S diagrams. Data from four XBT sections are displayed graphically.


	CONTENTS				
		Text Page	Fiche	Row	Col.
Abstract		i	1	Α	6
Contents		ii	1	Α	7
Diagram of Fig	che	iii~iv	1	Α	8-9
Acknowledgment	ts	٧	1	Α	10
Preface		γi	1	Α	11
Presentation	•	1	1	Α	12
Introduction		1	1	Α	12
Instrumentation	on	2-3	1	Α	13–14
Moorings		4	1	В	5
Data Processi	ng	4_5	1	В	5-6
Programs		6-7	1	В	7-8
References		8	1	В	9
Tables 1-4	(Data summaries)	9-13	1	В	10-14
Tables 5-8	(Mooring diagrams) (fiche only)		1	С	10-13
Figures 1-4	(Location maps)	14-17	1	С	5-8
Figures 5-6	(White Horse vector profiles)	18-25	1	D	1-8
Figure 7	(White Horse nets)	26-32	1	Ε	1-7
Figures 8-10	(Time series plots,				
	current meters)	34-43	1	F-G	1-5
Figures 11-12	(CTD, XBT)	44-46	1	E-F	9–12

·	Fiche only
Moorings(WHOI): 593 594 595	Fiche Row col. 2 A-C 1-7 2 D-6 1-7 2 A-C 8-14
596 597 (MIT): DO 190,200 (MIT): DL 190,200,210	2 D-6 1-7 2 A-C 8-14 2 D-G 8-14 2 D-G 1-7 3 E 2-5 7 F-G 1-5
White Norse drops and CTD profiles: 501-504 601-611 701-708 801-806	3 A-F 1-A- 3 A-F 5-14 4 A-F 1-8 4 A-F 9-14
807 X 901-905 1001-1003 1101-1103	4 AF 9-14 5 A-F 1-6 5 A-F X-9 5 A-F 10-12

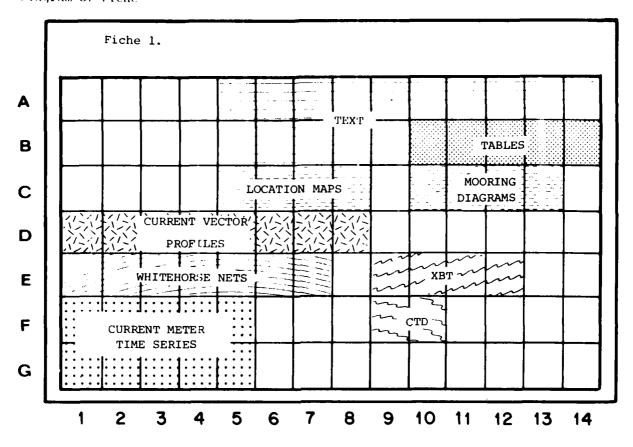

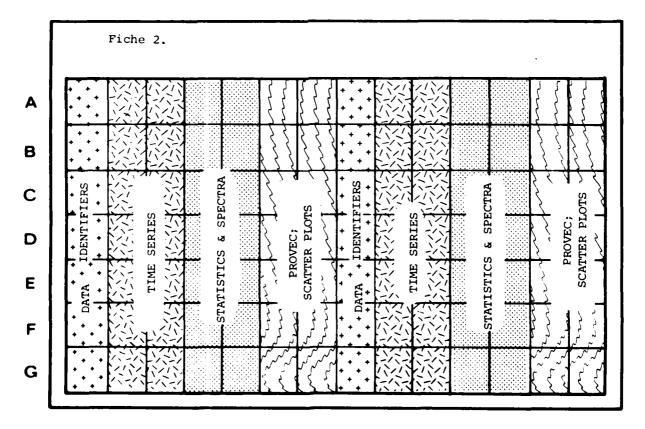

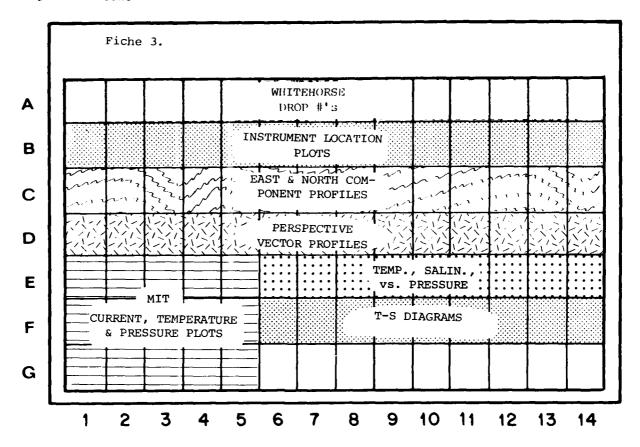

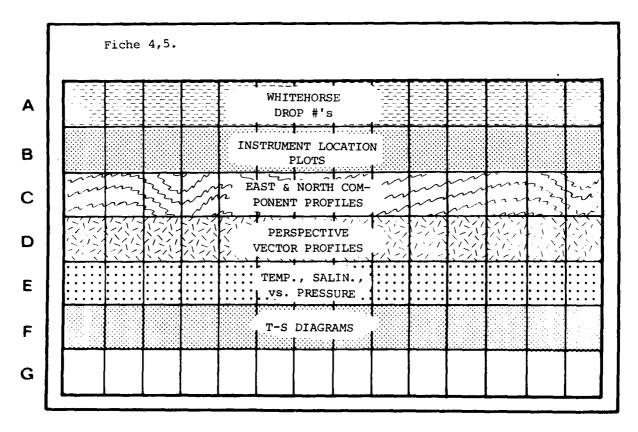

ACKNOWLEDGMENTS

v

Many people should share the credit for the good quality of data obtained from the instruments set during this experiment; the people in the Buoy Group instrument shop, those who worked on mooring hardware and design, and those who contributed to the development of the White Horse system. The officers and crew of the R/V ATLANTIS II deserve special mention for their willing assistance with mooring deployment and recovery and for their efforts to help develop techniques for White Horse handling. The principal investigator for this experiment was Dr. James R. Luyten. Gordon Volkmann prepared the CTD and XBT plots, and Gerald Needell was of great assistance with the processing and editing of the White Horse data. The T/P data and MIT current meter data are courtesy of Drs. C. Wunsch and C. C. Eriksen, respectively, at MIT.

The experiment was supported jointly by the Ocean Science and Technology Division of the Office of Naval Research (Contract number N00014-76-C-0197, NR 083-400) and the National Science Foundation (Grant numbers ATM76-02196 and ATM78-21491). The analysis of the T/P data was supported by the National Science Foundation (Grant number DES72-01384).

PREFACE

This volume is the twenty-fourth in a series of Data Reports presenting moored current meter and associated data collected by the WHOI Buoy Group.

Volumes I through XX[II present data obtained during the years 1963-1978, arranged either by year or experiment (see notes).

A data directory and bibliography for the years 1963-1978 has been published, as WHOI Technical Report 79-88.

Volume XXIV presents data from the INDEX Experiment, 1976.

Volume	WHOI		Notes
No.	Ref. No.		Year Experiment
I	65-44	Webster, F. and N. P. Fofonoff	
ĪI	66-60	Webster, F. and N. P. Fofonoff	
	67-66	Webster, F. and N. P. Fofonoff	
Ĭ	70-40	Pollard, R. T.	
V	71-50	Tarbell, S. and F. Webster	
۷I	74-4	Tarbell, S.	1967 measurements
	74-52	Chausse, D. and S. Tarbell	1968 measurements
1117	75-7	Pollard, R.T. and S. Tarbell	1970 Array Data
IX		Tarbell, S., M. G. Briscoe	1973 IWEX Array
		and D. Chausse	
X	76-40	Tarbell, S.	1969a measurements
ΧI	76-41	Tarbell, S.	1969b measurements
XII	76-101	Chausse, D. and S. Tarbell	1973 MODE Array
XIII	77-18	Tarbell, S. and A. W. Whitlatch	1970 Measurements
	77-41	Tarbell, S., R. Payne and	1976 mooring 592
		R. Walden	Saint Čroix
X۷	77-56	Tarbell, S. and A. W. Whitlatch	1971 measurements
XVI	78–5	Tarbell, S. and A. Spencer	1971-1975 MODE Site
XVII	78-49	Tarbell, S., A. Spencer	1975-1977 POLYMODE
		and R. E. Payne	Array II
IIIVX	7965	Tarbell, S., M. G. Briscoe	1978 JASIN
		and R. A. Weller	
XIX	79_34	Spencer, A., C. Mills	1974-1975 POLYMODE
		and R. Payne	Array I
XX	79–56	Spencer, A.	1974 Rise Array
	79–85	Mills, C. and P. Rhines.	1978 W.B.U.C.
XXII	79–87	Tarbell, S. and R. Payne.	1973 measurements
XXIII	80-40	Tarbell, S. and R. Payne.	1978 POLYMODE
			Array III

PRESENTATION

The printed portion of the report contains introductory text and information about the instruments and data processing procedures. Tables and figures give summaries of the location of the instruments. Data are shown graphically in numerous composite displays.

These pages are also reproduced on Sheet 1 of the microfiche. Sheet 2 contains displays of the basic current meter data, including spectral plots, tables of statistics, time series plots, progressive

vector diagrams and scatter plots.

The White Horse data are snown on Sheets 3, 4 and 5 in the top four rows. Displays include velocity component profiles, perspective vector plots and horizontal position plots. (TD plots are shown in the next two rows and plots of the data from the T/Ps and current meters from MIT are snown in the bottom left corner of Sheet 3.

A detailed layout of the data on the microfiche sheets is shown on pages iii and iv.

INTRODUCTION

Seven moorings, with a total of 16 current meters and 14 T/P recorders, were set in May, 1976, and recovered in December, 1976. Forty-one velocity and CTD profiles were taken with the White Horse between May 13th and June 19th. See Figures 1, 2 and 3 and Tables 1 and 3 for details of instrument locations, and Figure 4 and Tables 2 and 4 for times and data quality. In Tables 1 and 2, note that records from moorings 594 and 597 are continuous in time at the same location. Mooring 594 was accidentally released after 3 weeks. It was reset as mooring 597. The data were collected as a component of the INDEX-76 experiment, a pilot investigation of the western equatorial Indian Ocean. These pilot observations were used to define an oceanographic component (INDEX-79) to the First GARP Global Experiment (FGGE), recently completed.

Scientific analyses of data from this experiment have appeared in the following references: Luyten and Swallow (1976), Swallow and Luyten (1976), Luyten (1980), Eriksen (1980) and Luyten (2 papers

submitted).

INSTRUMENTATION

Current Meters

The current meters described in this report were Vector Averaging Current Meters (VACMs), built by AMF SeaLink Systems (now EG and G SeaLink Systems), or Model 850 current meters built by Geodyne, now a

part of Egerton, Germeshausen and Grier (EG and G).

Each time a pair of rotor magnets passes the sensing diode, the VACM samples compass and vane information and computes a measure of east and north water current components. These components are summed through the entire recording interval, usually 15 minutes, thus giving a true vector average. One complete rotor revolution initiates 8 compute cycles. Temperature is derived from a voltage-to-frequency converter (v/f), whose output frequency is related to the thermistor resistance at its input. The v/f output pulses are summed over the entire recording interval, thus averaging temperature. The thermistors are routinely calibrated before and after deployment and the temperatures are accurate to $\pm .01^{\circ}$ C (Payne et al., 1976). All variables are recorded on a cassette tape at the end of each recording interval.

The Model 850 current meter stores burst sampled data on magnetic tape cartridges. The instrument collects and stores 23 or 24 data cycles sampled at 5.27 second intervals. It then turns off for the remainder of the recording interval (usually 15 or 30 minutes). Model 850's which are modified to include temperature measurements accumulate the count from the temperature circuit from one 5.19 second period and store it at the beginning of each data burst.

Time was measured using a quartz crystal oscillator with a manufacturer's specified accuracy of ± 1 second per day. All stated times are in UTC (Universal Coordinated Time). The instrument clock times were synchronized with UTC before mooring launch. After

recovery, differences in the two times were noted.

The Aanderaa current meters deployed by MIT also use a Savonius rotor to sense water motions. At the end of a recording interval, the total number of rotor turns for that interval, instantaneous compass, vane values and thermistor output are recorded. A quartz crystal oscillator is used for timing.

Temperature/Pressure Recorder

An instrument to record temperature, pressure and time (T/P) was developed in the Draper Laboratory at MIT for MODE-1 and has been used extensively since 1973. The instrument stores a sample every 15 seconds and records the sum of 64 successive data samples every 16 minutes on a magnetic tape cassette $(64 \times 15 = 960 \text{ seconds} = 16 \text{ minutes})$.

Temperatures have a resolution of .001°C (Wunsch and Dahlen, 1974). The absolute accuracy is not specified.

The pressure sensor is a strain gauge with a manufacturer-specified accuracy of .03 per cent of full scale (Wunsch and Dahlen, 1974). These sensors are recalibrated for each instrument deployment.

XBT

450-meter XBT probes were dropped along the four transits to and from the working area. Of the four sections made, section 2 extended from Mombasa to 57°E, the others only to 53°E. Surface currents were measured from ship's drift. Surface temperature and salinity were measured hourly along the transits. The plots show the vertical temperature sections from the XBTs, with surface current vectors, surface temperature and salinity along the tracks.

White Horse

The white Horse is a freely-falling, acoustically self-navigating dropsonde used to determine vertical profiles of horizontal ocean currents. The instrument records internally the round-trip travel time for an acoustic pulse between the instrument and up to 4 bottom moored acoustic transponders. In this experiment, three bottom beacons were routinely used when available: for each survey, and for at least the first drop at each net, after which the third beacon was usually recovered for use at another net.

The sampling interval is 20 seconds, so that the three dimensional position is determined every 20 seconds. Successive positions are differenced to obtain an average velocity over the 20 second (~20 meter) vertical interval. A second instrument, the Black Horse, is similar to the White Horse. Its electronics are identical, but its exterior configuration is different, which results in a different fall rate. It suffered electronic and mechanical difficulties during this experiment. For details on the design, evaluation and performance, see Luyten et al. (1980).

CTD

A Neil Brown Instrument Systems CTD (Brown, 1975) was mounted on both the White Horse and the Black Horse. Vertical profiles of temperature and salinity were obtained from the White Horse in most cases; the Black Horse CTD malfunctioned. The sampling rate for the CTD is 1Hz, so that at a fall rate of approximately 1 m/sec, a vertical resolution of 1 meter is obtained. The in-situ calibration of the CTD was accomplished by fitting the deep sigma-theta curves to that obtained from a hydrographic station, occupied while the White Horse profile was being made. Table 4 indicates at which drop sites a CTD profile yielded good data. Plots of temperature and salinity versus depth and T-S diagrams are displayed on microfiche for these CTDs and a sample is shown in Figure 11.

MOURINGS

Details of mooring configuration are shown in Tables 5-8. The items on each mooring are listed together with depths in meters and data names. Due to the accidental release of Mooring 594, it is listed in combination with replacement Mooring 597. Both depths are listed, if different, and both data names are listed.

The anchors, unless otherwise stated, are 3000 pound wet weight cylinders.

The item "17" balls and chain" refers to glass flotation spheres of 17" diameter with hard hats, each one bolted to 3/8" chain at 1 meter intervals.

Figure 2 shows mooring locations and Tables 1 and 2 give summaries of the instruments, their depths and the quality of the data. Figure 3 shows the depths of the instruments on the moorings and water depths. Note that the depths for the MIT triplet are measured up from the bottom.

See Heinmiller (1976) for a more complete description of WHOI moorings.

DATA PROCESSING

Current Meters

The data from the instrument tapes were transcribed to 9-track magnetic tapes, converted to scientific units, edited to remove launch and retrieval transients and bad points, and linearly interpolated across missing or erroneous data cycles.

WHOI data are identified by a mooring number, a sequential instrument position number (e.g., 5953 is the third instrument down on mooring 595), a letter to indicate the data version (e.g., 5953B is the second editing of 5953), and a number to indicate the time sampling interval for that data record (e.g., 5953B1800 is the half-hour (1800 seconds) averaged version).

Low passed versions of data series were formed by passing the data through a Gaussian filter with a 24 hour half-width, and then subsampling the filtered series once a day. The composite plots shown for each WHOI mooring and the plots of the data from MIT use these filtered data series.

MIT current meter records are named with a prefix DO or DL, and only low passed data are shown in this report, on microfiche.

Temperature/Pressure Recorders

Preliminary cassette reading and data processing were done at MIT. The basic time series received by WHOI were truncated to remove launch and retrieval transients, but no detailed editing was done. Basic spectral plots, time series and statistics are shown for the T/Ps on the WHOI moorings, and the low passed temperature data are shown on the composite temperature plots for each mooring. Low passed data is shown on fiche for the T/Ps on the MIT moorings.

White Horse

Processing of the White Horse data consists of:

- 1. Transferring raw data from the instrument cassette to 9-track magnetic tape.
- 2. Decoding to obtain travel times, conductivity, temperature and pressure at 20 second time intervals.
- 3. Converting travel times and pressure to positions relative to the beacons. Editing occurs before and during this step.
- 4. Converting travel time to slant range using a vertical ray approximation and the sound velocity profile obtained from the CTD.
- 5. Converting changes in position to velocity components at depth intervals of 25 meters, by linear interpolation. Further editing may be done at this stage.

A survey of the beacon positions is run at each drop site (net). The coordinates of the acoustic transponder net are estimated using a bootstrap technique whereby the transponders are interrogated from various positions at a known depth near the ocean surface. Typically the range is determined from 13 different locations at the surface. The net parameters are estimated using a least squares technique developed by Hunt et al. (1974). After step 2 the survey tape data are processed to obtain beacon locations, shown in Table 3 and these data are used for step 3.

Diagrams of the nets and surveys are shown in Figure 7. Summaries of the time, location and data quality at each drop are given in Tables 3 and 4. East and north components of velocity and velocity 'stick' vectors are shown on microfiche for each drop of the White Horse. The depth is computed from the pressure reading of the instrument and the velocities are averaged over 25 meter intervals, the uppermost point shown being an average of surface points. Conductivity is not shown and temperature and salinity are displayed on CTD plots.

Data records are identified by net and drop number, e.g., record 603 is the third drop at the Net 6 location.

There is a problem noted in Table 4, the 4 millisecond problem. Interference occurs when returning signals from two transponders arrive within 4 milliseconds of each other: only the first is recorded.

PROGRAMS

Time Series

Current meter variables versus time are presented graphically. Plots from WHOI temperature/pressure recorders are based on the 1920 or 1800-second sampling interval data series, subsampled every 4 hours. Only low passed data are shown for the MII T/Ps. The composite plots (Figures 8-10) are based on daily averaged time series.

Statistics

Statistics for each variable measured by the current meters and T/Ps are presented on microfiche, Sheet 2, in columns 4, 5, 11 and 12. Mean, standard error, variance, kurtosis and extrema are given for all the variables; east and north covariance, correlation and other statistics are given for the vectors. For reference, note that a Gaussian random variable would have a kurtosis of three and a skewness of zero.

See Volume XVII (POLYMODE Array II) of this series for a more detailed discussion of these parameters.

Progressive Vector and Scatter Plots

Based on a daily averaged time series, the current vectors are placed tail-to-head so as to show the path that a perfect particle in a perfectly homogeneous flow would have travelled. Flow regimes and low frequency behavior show up well on this type of plot. The plot begins with an asterisk and the first day of each month is marked with a plus sign and annotated.

Every second point from the series is plotted in a scatter plot, in which east and north components are plotted as points on a polar diagram. The line drawn through the points is the principal axis. It has slope theta (φ) (where theta is given by $\tan(2\varphi) = (2u\bar{\nu}) / (u\bar{\nu} - v^2)$) and it passes through the point $(u,\bar{\nu})$.

White Horse Plots

The east and north component profiles are plotted with one point every 25 meters, for both the down and up traces. No further smoothing is done, but surface points are averaged together to give one value at zero meters.

The 'perspective' vector plot is an isometric plot, so the length of the vector is its true length: it is not foreshortened for a perspective effect. For the vectors in Figure 6 and for the individual drop plots shown on microfiche, the vector at each depth is an average of the up and down values. These data are then passed through a triangular averaging filter over three depth points. For the plots in Figure 5, an average vector for the net is computed at each depth, and the resulting vector profile is passed through a triangular averaging filter over five depth points.

The position plot shows the position of the instrument in an x-y plane since it falls through the water and then rises again. A point is plotted approximately every 20 seconds and the distances are measured from Beacon 1, the origin beacon of the net. An extra plot is shown for 1103 as position values were markedly different in the two configurations used to make a final composite profile. In the case of 1101, where a composite was also formed, the differences were much smaller. In both cases, noise in Beacon 1 signals was the problem. The plot for 501 shows a change of scale, to include the top 500m of the up trace, which was used to form a combined profile.

Vector Stick Plots

The 24-hour averaged current components are plotted as individual vectors along a time scale. Unless otherwise indicated, the vector orientation is such that north is upwards on the page.

Spectra

The norizontal kinetic energy (HKE) and temperature are displayed as spectra. The HKE spectrum is half of the sum of the spectra of the east and north components. It has the advantage of not being tied to a particular coordinate system.

The HKE and temperature have units of (cm^2/sec^2) /cph and $(^{\circ}C)^2$ /cph respectively. The spectra are all one-sided, i.e., the area under the spectrum is equal to the variance of the original record. The plots are log-log rather than 'variance preserving', i.e., the contributions of various frequency bands to the total variance are not in proportion to the displayed areas.

The spectra are calculated based on data sequences of 2560 points (a 'piece'), with the exception of the 900 second basic series which are split into three pieces. Frequency band averaging is across five frequencies, giving a lowest frequency of 1/21.3 cycles per day and a nighest frequency of 2.4 cycles per day. No data-windowing or prewhitening is done.

TIMSAN, the WHOI program (Hunt, 1977) used to produce the spectra, additionally averages the spectra in increasing groups at the higher frequencies to prevent having to plot thousands of points. This procedure gives few degrees of freedom (d.o.f) at the lowest frequencies, many at the highest frequencies. For the spectra calculated from one piece with five frequencies averaged (most of the spectra), there are 10 d.o.f. in the 40 lowest frequencies, and 120 d.o.f. in the highest frequency. The 95 per cent confidence limits corresponding to these two extremes are (3.08, .49) and (1.31, .79).

REFERENCES

- Brown, N., 1975, A precision CTD microprofiler. WHOI Ref. 75-18 (Technical Report)
- Eriksen, C. C., 1980, Evidence for a continuous spectrum of equatorial waves in the Indian Ocean. J. Geophys. Res., 85, 3285-3303.
- Fofonoff, N. P., S. P. Hayes and R. C. Millard Jr.,1974, WHOI/Brown microprofiler: methods of calibration and data handling. WHOI Ref. 74-89 (Technical Report).
- Heinmiller, R. H., 1976, Woods Hole Buoy Project Moorings, 1960-1974. WHOI Ref. 76-53 (Technical Report).
- Hunt, M., 1977, A program for spectral analysis of time series. WHOI Technical Memorandum 2-77.
- Hunt M., W. M. Marquet, D. A. Moller, K. R. Peal, W. K. Smith and R. E. Spindel, 1974, An acoustic navigation system. WHOI Ref. 74-6 (Technical Report).
- Luyten, J. R., 1980, Recent observations in the western Indian Ocean, in Monsoon Dynamics, M. J. Lighthill, editor. Pergamon Press.
- Luyten, J. R., Equatorial Current Measurements, I. Moored Observations, submitted to J. Mar. Res.
- Luyten, J. R., Equatorial Current Measurements, II. Vertical Profiles, to be submitted to J. Mar. Res.
- Luyten, J. R. and J. C. Swallow, 1976, Equatorial undercurrents. Deep Sea Res., 23, 1005-1007.
- Luyten, J. R., G. Needell and J. Thomson, 1980, An acoustic dropsonde the White Horse: design, performance and evaluation, submitted to J. Phys. Oceanog.
- Payne, R. E., A. L. Bradshaw, J. P. Dean and K. E. Schleicher, 1976, Accuracy of temperature measurements with the V.A.C.M. WHOI Ref. 76-94 (Technical Report).
- Swallow, J. C. and J. R. Luyten, 1976, Surface Currents and Salinities in the western Indian Ocean, Ocean Modelling, 1 (unpublished manuscript, DAMTP, Cambridge University).
- Wunsch, C., and J. Dahlen, 1974, A moored temperature and pressure recorder. <u>Deep-Sea Res.</u>, 21, 145-154.

TABLE 1
SUMMARY OF MOORINGS

Record No.	Depth (m)	Date Set A II, C Leg VIII	Date Retr. ruise 93 Leg XV	Location	Bottom Depth (m)
WHOI 5931 5932(T/P) 5933 5934	203 501 1500 3545	May 13 1976	2 Jan. 1977	0° 3.1'N 50° 28.3'E	5082
5941 5942(T/P) 5943 5944 5945	201 501 1500 2508 3544	May 15 1976	11 June 1976 (Leg IX)	0° 0.6'N 52° 59.6'E	5074
5951 5952(T/P) 5953 5954 5955(T/P)	202 500 1500 3542 4549	May 18 1976	4 Jan. 1977	1° 30' N 52° 59.4'E	5117
5961(T/P) 5962 5963 5964	252 551 1550 3595	May 19 1976	31 Dec. 1976	0° 0.1'S 56° 59.9'E	4711
5971 5972(T/P) 5973 5974 5975	201 501 1500 2508 3544	June 12 1976 (Leg IX)	1 Jan. 1977	0° 0.9'N 52° 58.9'E	5072
MIT DO190 DL191(T/P) DL192 " DL193 " DL194 "	4437 4438 4741 4950 5037	May 17 1976	3 Jan. 1977	0° 45'N 53° 0.1'E	5053
D0200 DL203(T/P) DL204 "	4442 4930 5030	н	11	0° 45.1'N 52° 59'E	5091
DL211(T/P) DL212 "	4819 4926	11	11	0° 46'N 52° 59.6'E	5057

TABLE 2

DATA RETURN AND QUALITY (moorings)

Record No.	Data Dates (1976)	Comments
Current Met	ers	
5931	May 14 - Dec. 2	Rotor came off bearings Dec. 3
5933 5934	May 14 - Jan. 1/77 May 14 - July 15	Rotor problem after July 15
5941 5943	May 16 - June 10	Tana advancement weekler
3343	May 16 - May 30	Tape advancement problem Instrument switched off
5944 5945	May 16 - June 10 May 16 - June 10	
	•	
5951	May 19 _ Jan. 3/77	Compass out of bearing on recovery Vane sticky due to barnacle growth No direction data
5953	May 18 - Jan. 3/77	
5954 5955	May 18 - Oct. 2 Nov. 2 - Jan. 3/77	No data written on tape in October
5962	May 20 - Dec. 30	Unusually low speeds around Dec. 18
5963 5964	May 20 - Dec. 30	No temperature data
5304	May 20 - Dec. 30	Temperature data looks unusual, possibly due to time problem Temperature data bad after Sept. 22
5971	June 13 - Dec. 31	
5973		No data (see 5943)
5974	June 13 - Dec. 31	Temp. questionable after Dec. 18 Time base off 52 minutes
5975	June 13 - Dec. 31	
D0190	May 18 - June 16	
D0200	May 18 - Sept. 8	
Temperature	/Pressure recorders	
5942	May 17 - May 31	Gappy record. No data shown
5955	May 18 - Jan. 3/77	
5961	May 20 - Dec. 31	
DL191	May 19 - Jan. 1/77	
DL192	II U	No temperature data
DL193	11 11	
DL194		
DL203	June 8 - "	Extensive editing, temp., press.
DL204	May 19 - "	want data to the control of
DL211 DL212	" " " "	Temp. data questionable towards end
	T/P records 5932, 595	Press. " " " " 2. 5972

TABLE 3
WHITE HORSE DROP SUMMARY

Urop Series	Location (Beacon 1 approx.)	Date of Survey 1976	Net Coordinates beac 1: x,y,z beac 2: x,y,z beac 3: x,y,z	Orientation of Net E of N
500	0° N 50° 30' E	May 13	0, 0,5049 5291, 0,5046 1551,3950,5052	9
600	0° N 53° E	May 15	0, 0,5049 4369, 0,5043 1323,3228,5049	0
	0 N 53 E	June 15	0, 0,5049 3620, 0,5043	0
700	0°_45'N 53 E	May 29	0, 0,5054 2137, 0,5053 1154,1715,5057	0
800	1 30'N 53 E	May 30	0, 0,5091 2192, 0,5085 1129,1834,5091	- 5
900	3° N 53° E	May 31	0, 0,5099 3547, 0,5101 1745,2161,5101	7
1000	5° N 53° E	June 1	0, 0,5083 3792, 0,5083 2457,2187,5085	5
1100	0 45 S 53 E	June 5	0, 0,4994 3880, 0,4991 2677,3439,4993	0

TABLE 4
WHITE HORSE DATA QUALITY

Drop	No.	Date	and	Time	Code I	Beacon	Notes
501		May	14	0820	DSX	23	Top 450m of up profile combined with rest of down profile Signal lost below 4765m Beacon 1 unusable due to distance
502 503		May May	28 28	1035 1706		23 23	beacon I anasable ade to distance
504		June		1010	BDS	23	CTD flooded at 2464m down
601		May	16	0900	Z	23	Beacon 1 noisy or no signal
602 603		May June	29 4	1238 1854	*	12 12	North comp. noisy, upper 500m up No data
604 605		June June	-	0018 0635	*S *	12 12	
606		June		0540	* D	12	Beacon 2 released from bottom with dropsonde
		new r	net.	due to	beacon	replacer	
607		June			*	12	
80 ò		June	15	1820	*	12	40-second sampling interval
609		June	15	1933	В	12	609heavy interpolation, less on up
610		June	16	1855	В	12	Heavy interpolation on up, above 2490m
611		June	17	1216	В	12	
701		May	17	1321		Α	Instrument close to baseline
702		May	30	0815	*	23	Beacon 1 noisy
703		June		0655	*	Α	Instrument close to baseline
704		June	6	1659	*	Α	Instrument close to baseline
705		June	10	2032	*4	Α	Down start at 2775m, (4) Up noisy, but O.K.
706		June	13	0637	*D4	A	No down profile above 150m Up not usable (4)
107		June	15	0803	*	Α	
708		June	17	0317	8D	12	Heavy interpolation above 1600m Pressure case flooded at 3200m up No signal from bea on 3

Code		Bea	con Configuration
*	Good CTD data, plot shown	Ā	All 3 beacons
В	Black Horse instrument used		used for position calculations.
D	Only 'down' profile available	12	Beacons 1,2 and pressure
S	Profile shallower than 4900m	23	" 2,3 " "
X	Beacon 1 retrieved after drop		
Z	Beacon 3 retrieved after drop		
4	4ms problem, see text		

TABLE 4 (cont.)

WHITE HORSE DATA QUALITY

Drop No	. Date and	l Time	Code	Beacon	Notes
801 802 803 804	June 3 June 7	0349	*Z * *D	A A 12 12	Up not usable, multiple problems No down profile above 350m
805 806 807	June 10 June 13 June 14	0753 1517 2343	* * *D4	12 12 12	Noisy data upper 200m No down profile above 200m 5 point smoothing done on noisy pressure data. Heavy interpolation around 750m down (4) Up not usable (4)
901 902 903 904 905	June 1 June 3 June 7 June 9 June 14	0444 1818	*Z * *D4 *	A 12 12 12 12	No up profile above 300m (rain!) No down profile above 100m Up not usable (4)
1001 1002 1003	June 2 June 8 June 9	0643 1436 0125	*Z * B	A 12 12	Heavy interpolation 300-450m up No up profile above 475m
1101 1102 1103	June 5 June 12 June 16	2202 0440 0547	* * B	AC A AC	Below 3000m, profiles formed from 2,3 beacon case 950-3100m, profiles formed from 2,3 beacon case

Co	d	P
1.0	v	•

- good CTD data, plot shown Black Horse instrument used В
- Only 'down' profile available Profile shallower than 4900m
- S
- Z Beacon 3 retrieved after drop
- 4ms problem, see text

Beacon Configuration

- All 3 beacons used for position calculations
- 12 Beacons 1,2 and pressure
- Profile derived from indicated combination of configurations

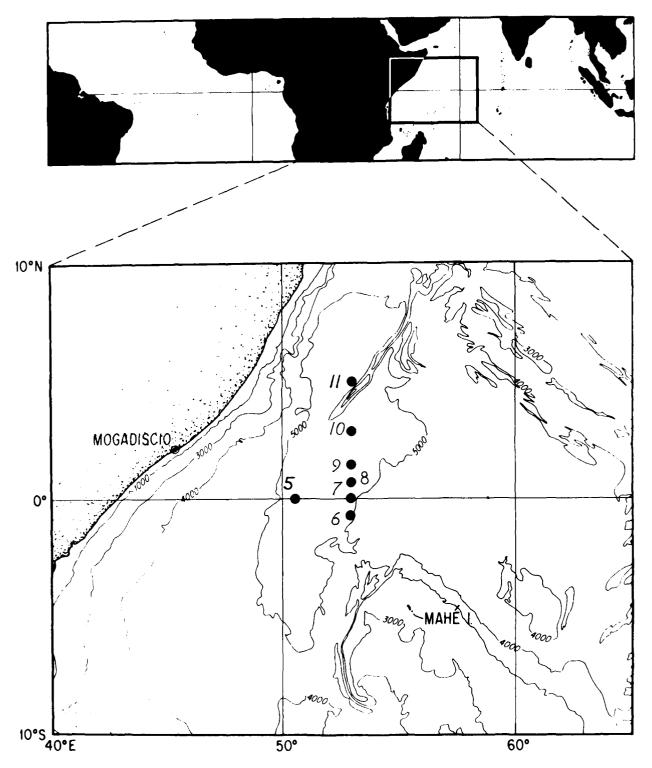
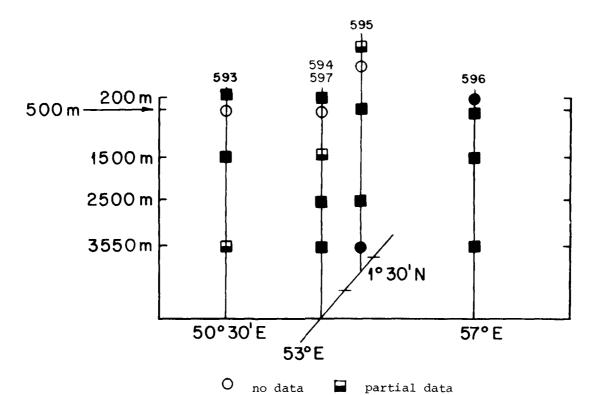


FIGURE L

Location of Experiment (black circles show Whitehorse drop sites)




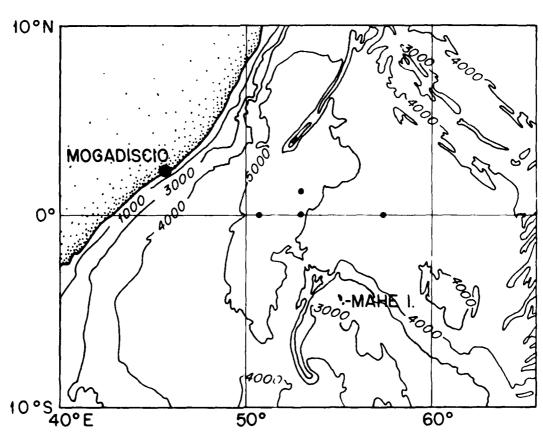



FIGURE 2 Location of Moorings

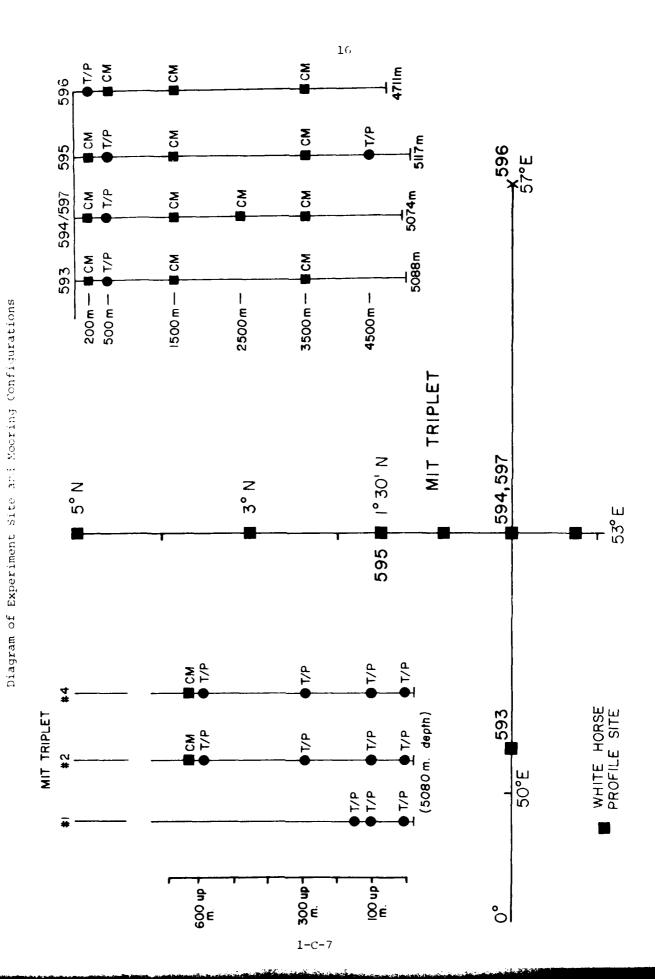

	904	805 806 807 705 70 <u>6</u> 707 708	606 607 608 619 611 1102 1103		1 08	Momboso
1003	903	803 804 703 704	603 504 605 1101			6 8 2 9 5
ōo (901 905	208 207 207	9 209		\$ <mark>\$</mark> .503	Mombosa 23 24 25 26 27 28 29 30 31 1 2 3 4
		(595) 800 (∆,MIT) 70 <u>0</u>	(6 65)	(965)	(593) 50i	'Mombasa 10 12 3 4 5 6 7 8 9 20 2 22 MAY
5°N (10) - 53°E	3•K 53•E	1°30'N(8) - 53°E 0°45'N(7) - 53°E	0°N(6) - 53°E 0° 45'S(1:) - 53°E	0°N - 57°E	0°N(5)- 50°30 E	, . ō


FIGURE 4

Mooring Deployment(e.g., (596)) and Whitehorse drops (e.g., 806) as a function of time

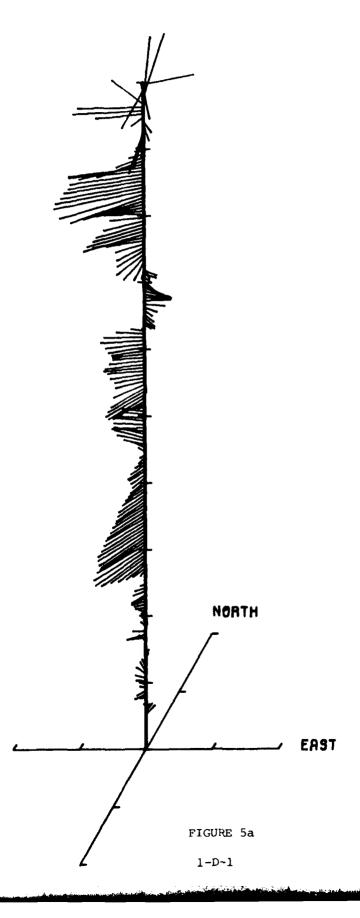

DEPTH SCALE
7 250 METERS

VECTOR SCALE
T 10 CM/SEC

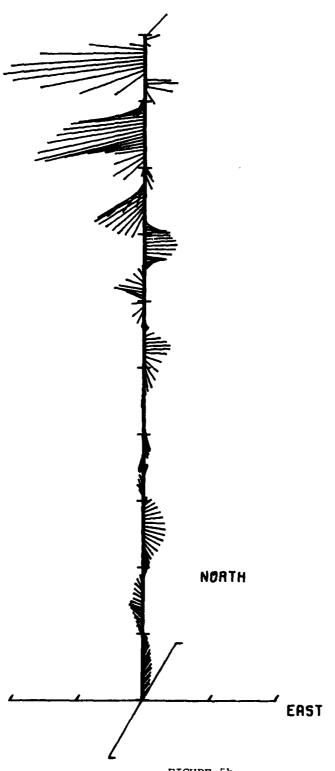


DEPTH SCALE
7 250 METERS

VECTOR SCALE
T 10 CM/SEC


FIGURE 5b


AVERAGE PROFILE, NET 7

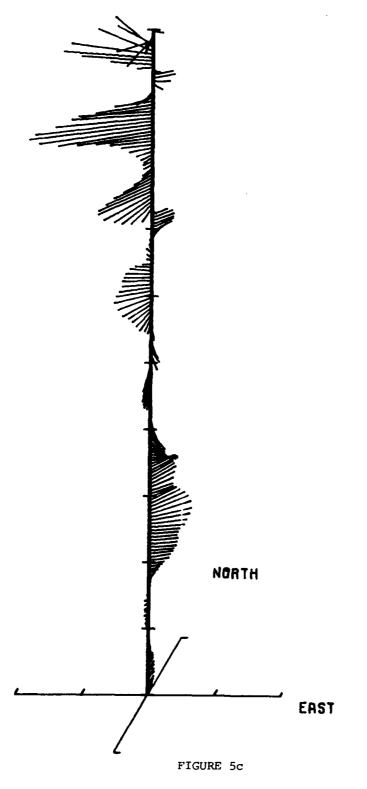

DEPTH SCALE
7 250 METERS

VECTOR SCALE
T 10 CH/SEC

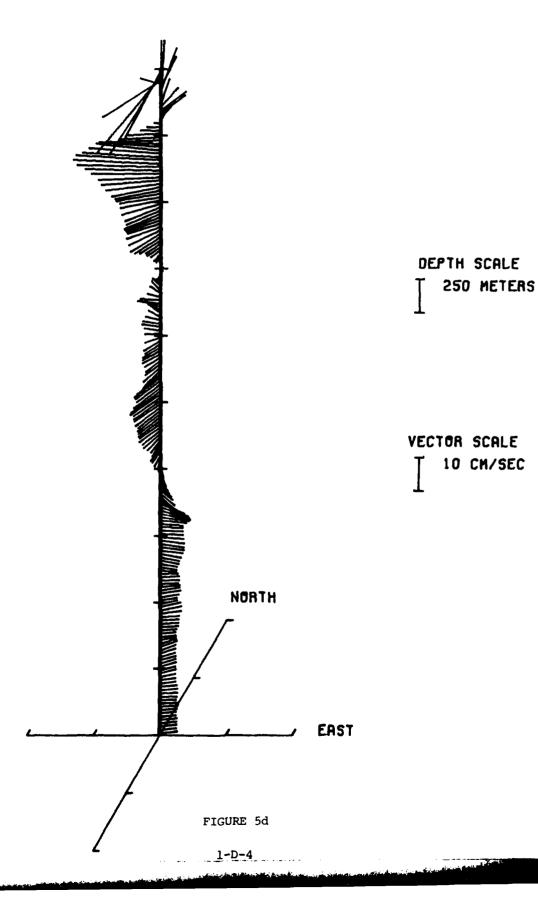

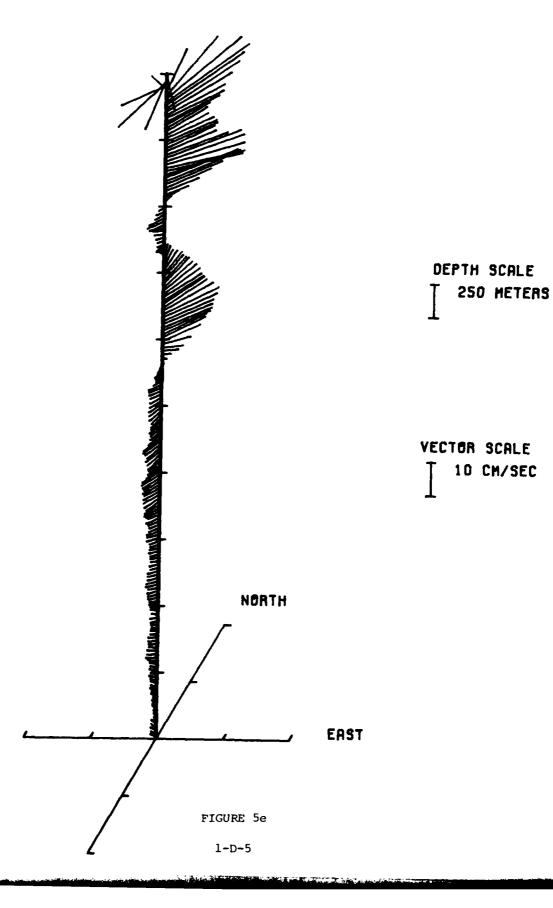



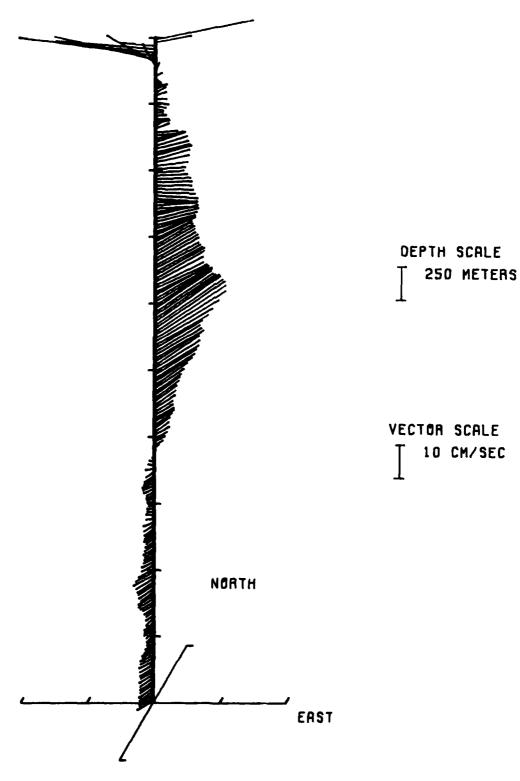


FIGURE 5f

AVERAGE PROFILE, NET 11

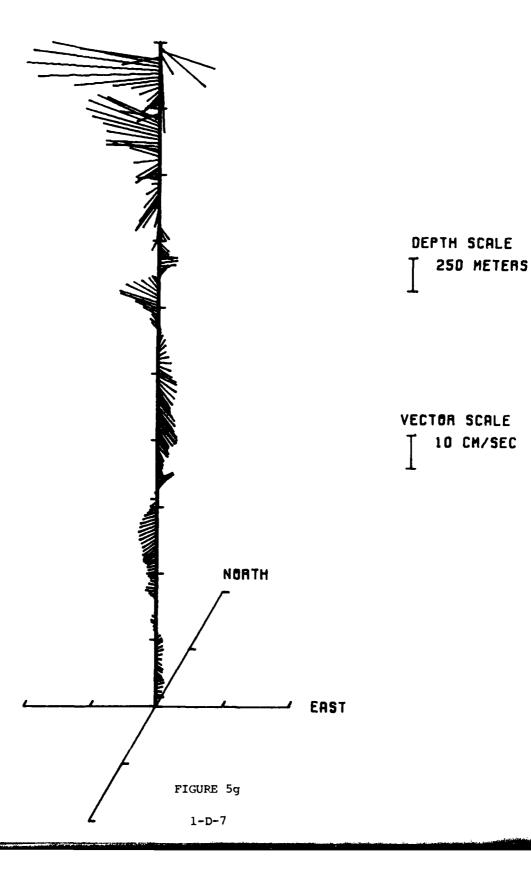


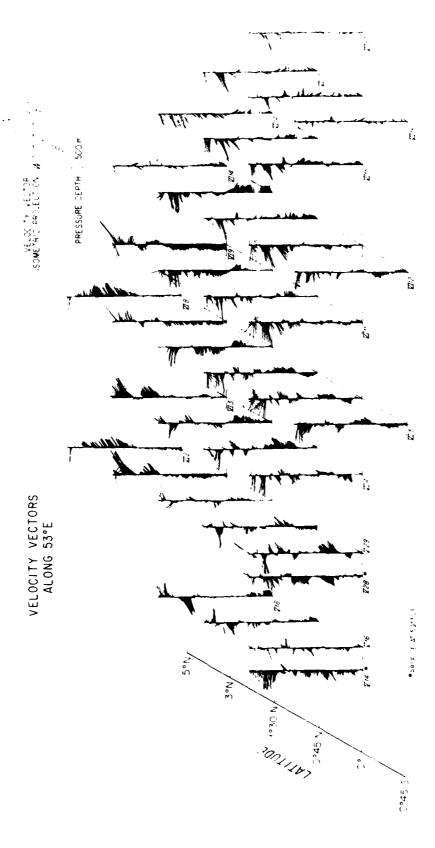

Average current vectors shown schematically for each drop

FIGURE 6


LOCATION OF NET 5

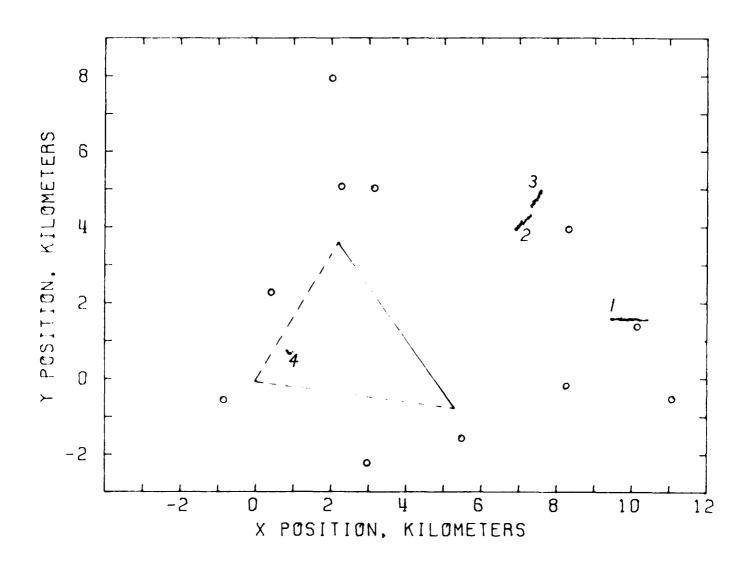

SURVEY LOCATIONS

WHITEHORSE DROPS


FIGURE 7a

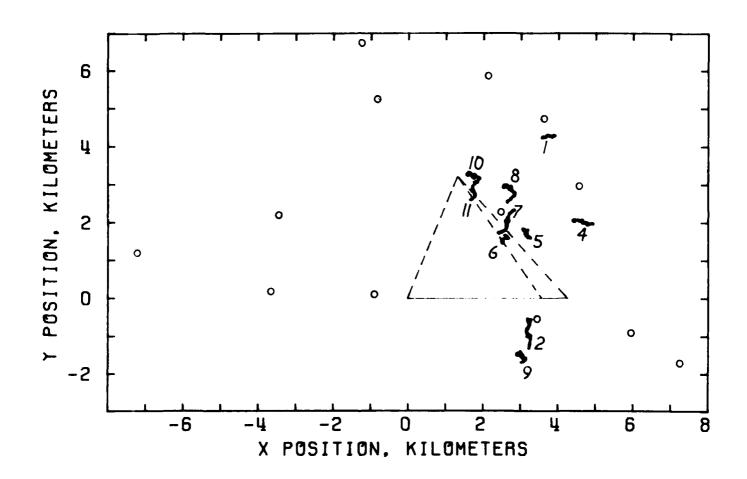

SURVEY LOCATIONS

WHITEHORSE DROPS


FIGURE 7b

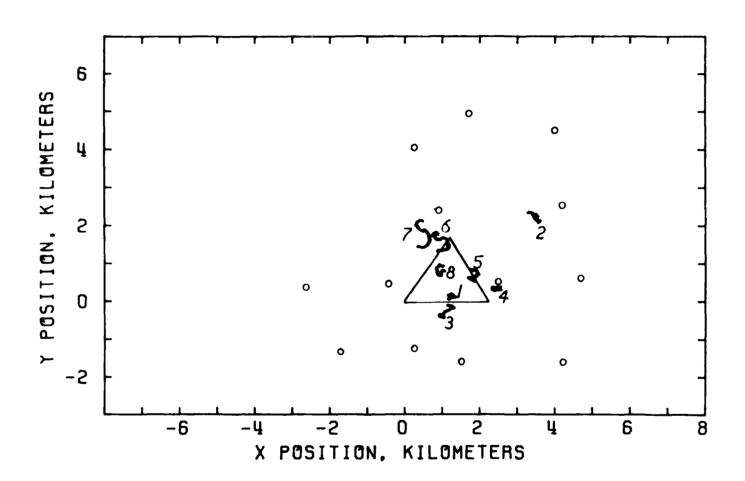

SURVEY LOCATIONS G

WHITEHORSE DROPS /


FIGURE 7c

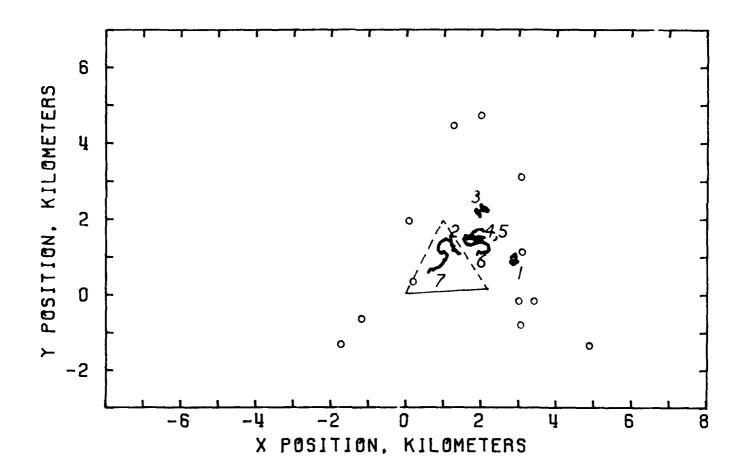

SURVEY LOCATIONS O

WHITEHORSE DROPS -


FIGURE: 7d

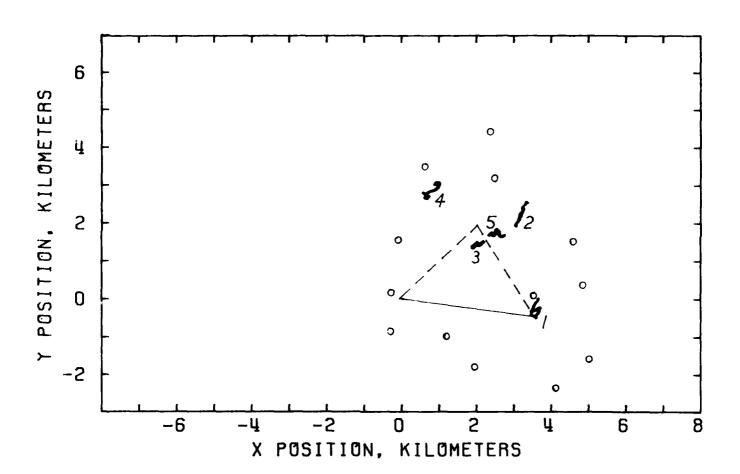

SURVEY LOCATIONS

WHITEHORSE DROPS


FIGURE 7e

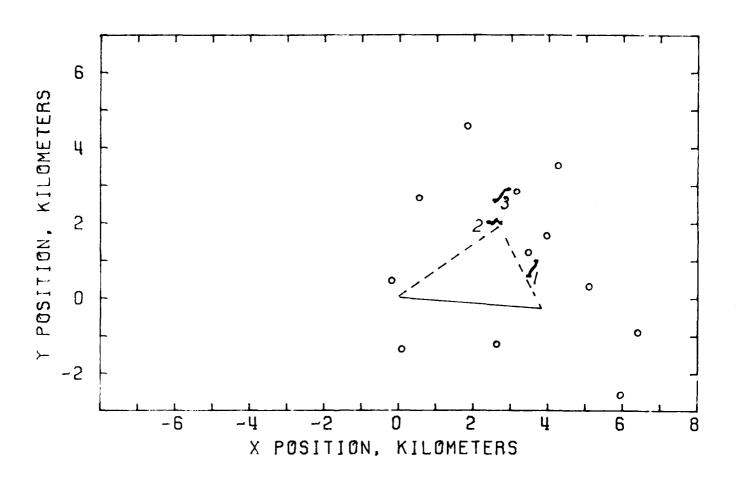

SURVEY LOCATIONS .

WHITEHORSE DROPS /

FIGURE 7f

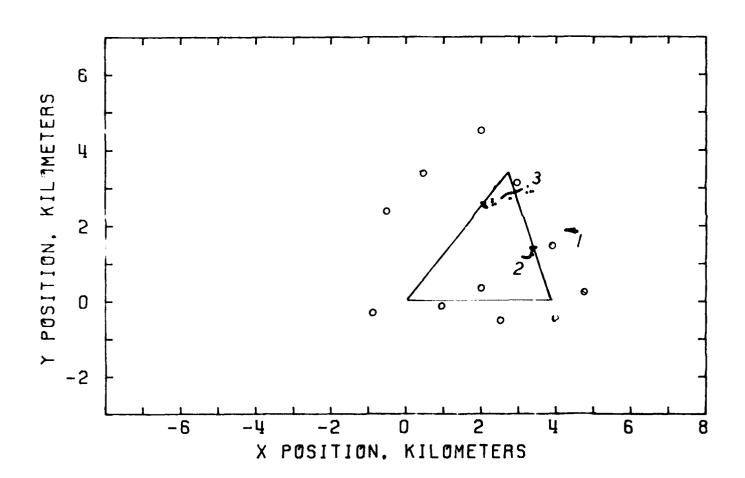

SURVEY LOCATIONS

WHITEHORSE DROPS -

FIGURE 7q

34
CURRENT VECTORS MOORING 593

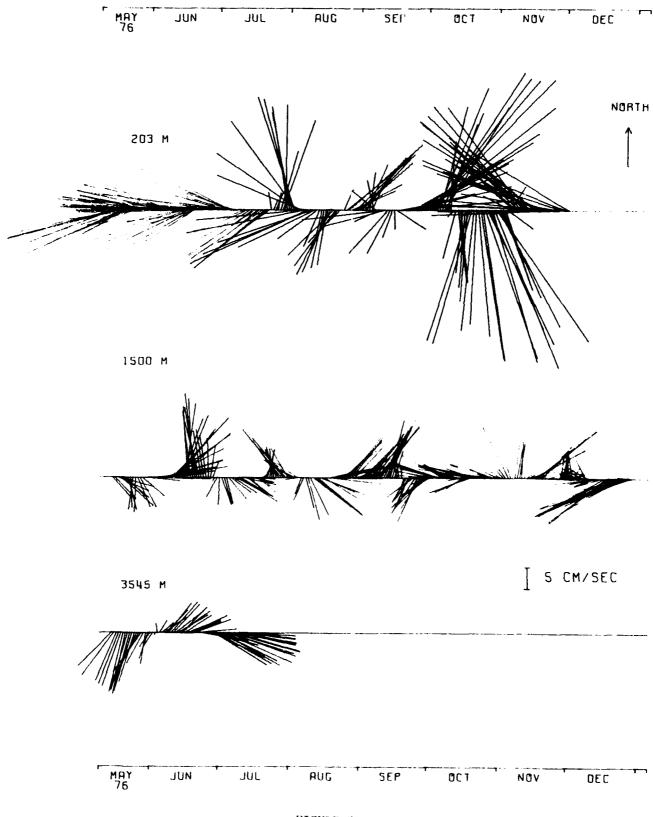


FIGURE 8a

TEMPERATURE RECORDS FOR MOORING 593

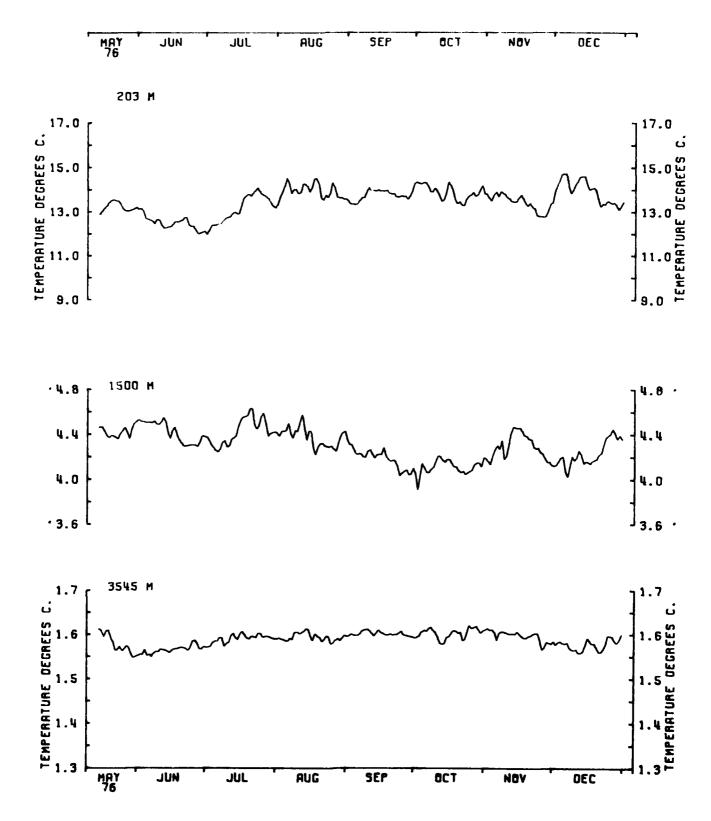


FIGURE 9a

CURRENT VECTORS

MOORINGS 594,597



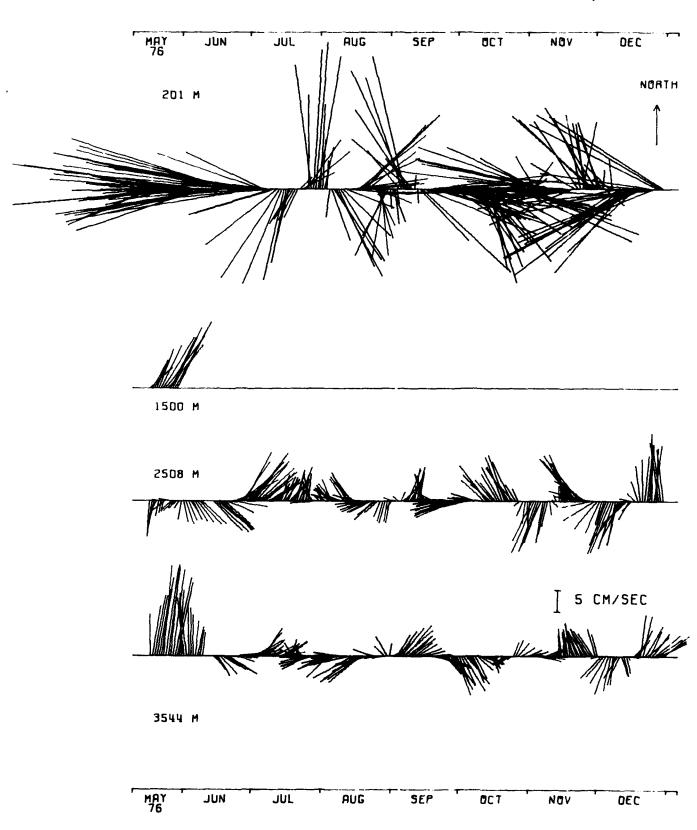


FIGURE 8b

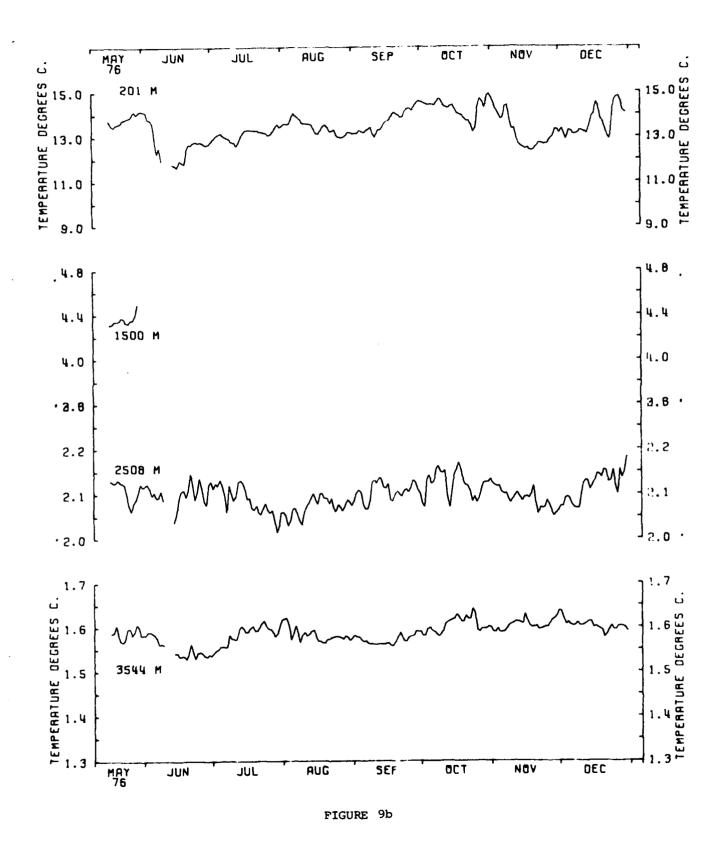


1-G-2

CURRENT VECTORS MOORING 595

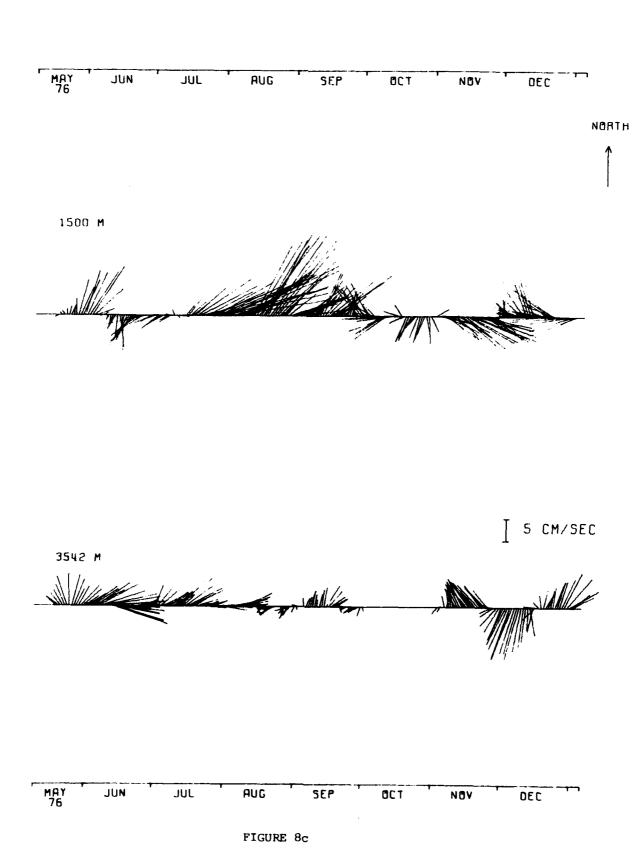

-F-3

TEMPERATURE RECORDS FOR MOORING 595

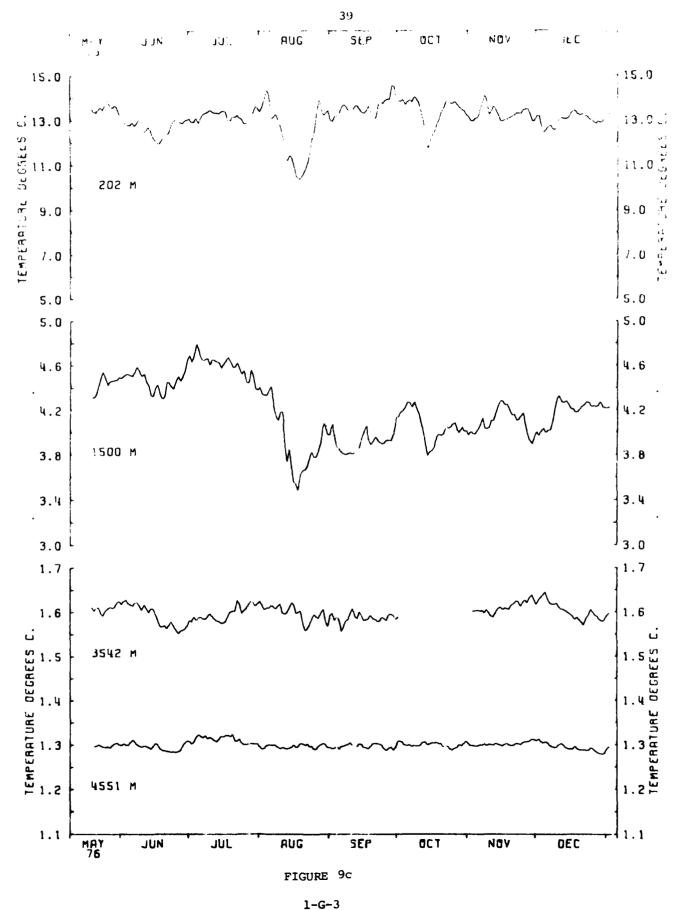



40

CURRENT VECTORS MOORING 596

JUN JUL RUG SEP OCT NOV DEC 551 M NORTH 1550 M I 5 CM/SEC 3595 M JUL אטע AUG SEP OCT DEC

FIGURE 8d

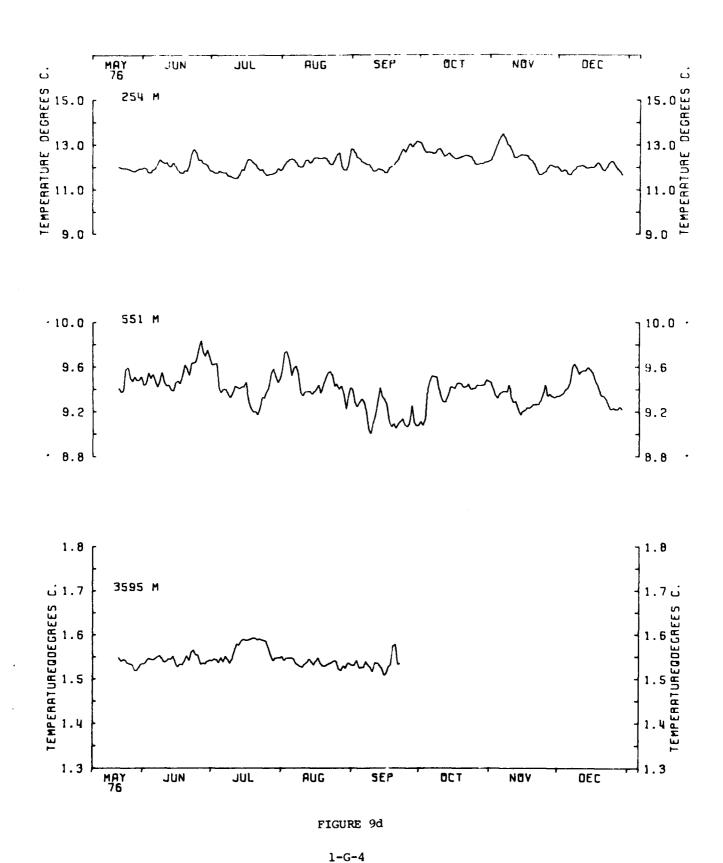

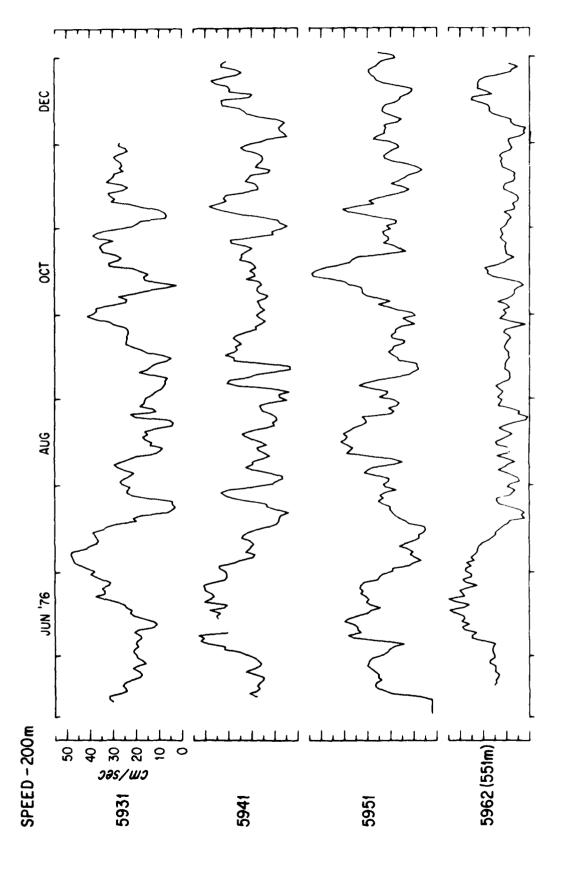

FIGURE

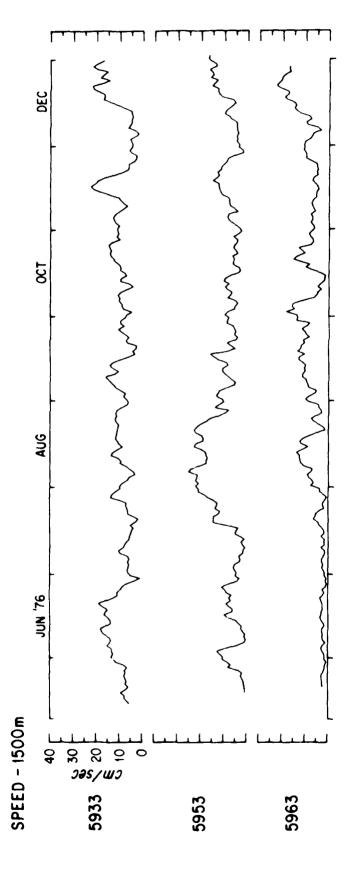
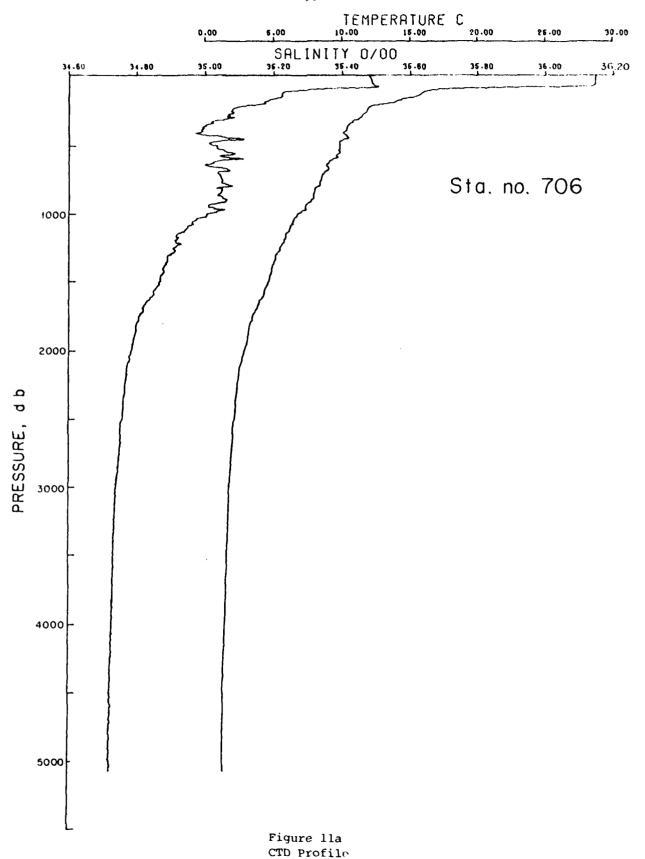


FIGURE 10b




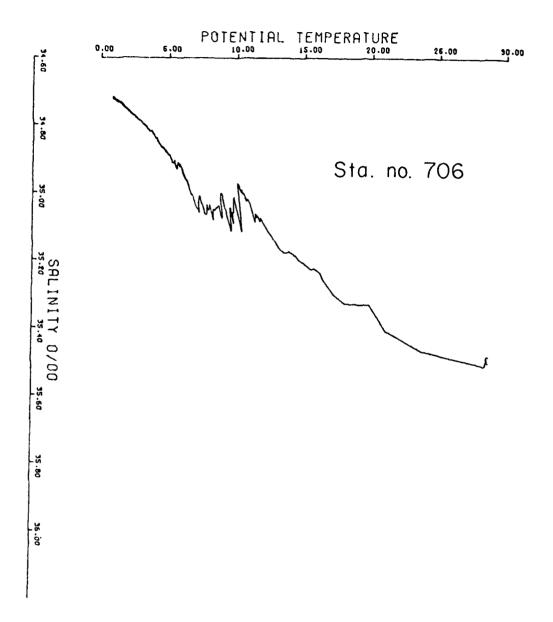


Figure 11b T-S Diagram

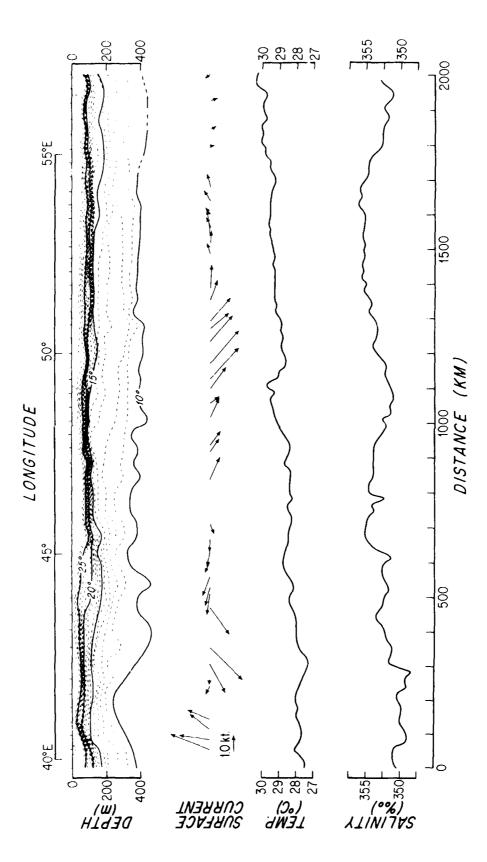

XBT Section and Surface Data Site of Mooring 536 to Mombasa, May 19-22 1976)

FIGURE 12b

MANDATORY DISTRIBUTION LIST

FOR UNCLASSIFIED TECHNICAL REPORTS, REPRINTS, AND FINAL REPORTS PUBLISHED BY OCEANOGRAPHIC CONTRACTORS OF THE OCEAN SCIENCE AND TECHNOLOGY DIVISION OF THE OFFICE OF NAVAL RESEARCH

(REVISED NOVEMBER 1978)

Deputy Under Secretary of Defense (Research and Advanced Technology) Military Assistant for Environmental Science Room 3D129 Washington, D.C. 20301

Office of Naval Research 800 North Quincy Street Arlington, VA 22217

- ATTN: Code 483 ATTN: Code 460
- ATTN: 102B
- CDR J. C. Harlett, (USN) ONR Representative Woods Hole Oceanographic Inst. Woods Hole, MA 02543

Commanding Officer Naval Research Laboratory Washington, D.C. 20375

ATTN: Library, Code 2627

12 Defense Documentation Center Cameron Station Alexandria, VA 22314 ATTN: DCA

> Commander Naval Oceanographic Office **NSTL Station** Bay St. Louis, MS 39522

- ATTN: Code 8100 ATTN: Code 6000 ATTN: Code 3300
- NODC/NOAA Code D781 Wisconsin Avenue, N.W. Washington, D.C. 20235

1. Ocean currents 2. Ocean temperatures 3. Indian Ocean 11. Spencer, Ann 11. O'Net11, kathleen 111. Luyten, James R. 11. NOD14-76-C-0197; 12. NOD14-76-C-0197; 13. NOD14-2199 14. ATY76-02196 15. VII. O(572-01384 17. Seard 15. NC(ASS/FIED) 17. Card 15. NC(ASS/FIED) 18. Card 15. NC(ASS/FIED)	1 Ocean currents 2. Ocean temperatures 3. Indian Ocean 1. Spencer, Ann 11. O'Neill, Kathleen 111. Luyten, James R. 11. WOOD14-76-C0197; NR 083-400 V. ATM76-02196 VI., DIS72-01384 S- This card is UNCLASSIFIED
woods Note Oceanographic Institution whol-80-41 A COPPLIATION OF POCEED CURRYTHERE BATA, WHITE HORSE RROFILES AND ASSOCIATED CURRYTHERE BATA, WHITE HORSE RXIV (IDLAN ORDER, ARM ARRAY), 17-78, by Am. Spencer, Ashalteen XXIV (IDLAN ORDER, ARM ARRAY), 17-78, by Am. Spencer, Ashalteen AXIV (IDLAN ORDER, AM. ARRAY), 17-78, by Contract Modol-4-De-C- 0197; NA 081-400 and for the "attend Science Foundation under Grants AIM5-02196, A.W.N-2169) and DEST-01384. Larraments debyload Guiffy and DEST-01384. Locan, Between 50°E and 50°E and Extend 198 and 28°E. Indeed the Reppersional was part of the "ILCS propsing Ton- Seven mooring sites were cacking the Activation of the sites. The current externs and eleven temperature Resulting data records are of eight critis duration. A current profiler, the White Horse, as also used, and 41 profiles were taken over a six-week period. As scales plots, filtered thables and graphically as scales the plots, progressive vector plots, spectral plots are presented in statis- titial ables and graphically as scales and plots of the series Basic Milke Horse data are presented as a sast and north current component profiles, position plots and service are as a service Rected CID data are circus are as a solds of core tall Basic Milke Horse data are presented as a sit and north Current component profiles, position plots and as a solds of profiles Excelled CID data are circus are distilyed graphically. Basic Milke Horse are distilated as plots of profiles and a from four XBI sections are distilated and as 15% additions.	Woods Hole Oceanographic Institution MIGL-880-41 A COMPILATION OF MICHES STATE SETAL WHITE PORSE PROFILES AND ASSOCIATED CICH. STATE STATE WHITE PORSE PROFILES AND ASSOCIATED CICH. STATE STATE STATE STATE O'NEILL and Jures R. Luyton. \$5 229-5. Citober 1950. Presared for the Office of Maral Revert. "Cete Contract NACIOL-8-C- 1907. MB 03-400 and for the NATIO-81 Science Foundation under Grants APHG-02196, AT-88-2198 and 0557-01384. Current and the momerature resource foundation instruments deployed during "59 of 1936 in the wretern Indian separatements deployed during "59 of 1936 in the wretern Indian ceparatements deployed during "59 of 1936 in the wretern Indian separatements deployed during "59 of 1936 in the wretern Indian separatements appet of the NISE Appress. The separature profiler when our 17 contract and eleven temperature profiler, the White Horse. assalso used, and 41 profiles were taken our a stancete period. The states are presented in statis- tical tables and graphical vassaciers plats, filtered the current component profiles, contracting and respective vector plots, spectral plots of cities events plots, filtered dassic ANIE Horse data the presented in statis- tical tables and graphical or statis- tical and statis and statis and graphical and statis- tical and statis and statis and graphical and statis- tical and statis and statis and graphical and statis-
1. Ocean currents 2. Ocean temperatures 3. Indian Ocean 1. Spencer, Ann 11. O'Ne1), Kathleen 111. Luyten, James R. 1V. M00014-76-C-0197; NR 083-400 V. ATW76-02196 VI. ATW78-21481 VII. DE572-01384 This card is UNCLASSIFIED	1. Ocean currents 2. Ocean temperatures 3. Indian Ocean 1. Spencer, Ann 11. O'Neill, Kathleen 111. Luyten, James R. 1V. NOOO14-76-C-0197; NR 0893-000 V. ATN76-02196 VI. ATN78-21991 VII. DE572-01304 This card is UNCLASSIFIED
access He'le Geanographic Institution access, He'le Geanographic Institution access, He'le Geanographic Institution A COPPILATION OF MODED CURRENT METER DATA, WHITE MOSSE PROTILES AD ASSOCIATED OCCAMAGNOPHIC OSSERVATIONS, VOLUNE TAILY (INDIAN GCAM AMBAY, 1966 by Ann Spence." Kathleen O'Meil and James R. Luyten. 46 pages. October 1980. Prepared O'Meil and James R. Luyten. 46 pages. October 1980. Prepared O'Meil and James R. Luyten. 46 pages. October 1980. Prepared Current and temperature measurements are presented from Instructure Solly and 57% and between 185 and 5%. The experient was pare of the INDEX program. Current sparl of the INDEX program. Experient was pare of the INDEX program. The State Trenders were occupied. Fourteen current meters and five tre-state programs recorders were on Mill monthis duration. A current the series are offered was also used, and 41 profiles were tisken over a sist-week paried. The series and gram-leady as sester posts, progressly vector of posts. Special points and the series piots. Filtered the sories and gram-leady as sestere posts, progressly weeter of posts. The series and gram-leady as sestere posts, progressly the series are shown in composite to Spids. The series and gram-leady as sestere posts, progressly weeter of posts. The series are shown to composite as east and north Selected CTO data are displayed as poles of potential the persture and salinity vervus pressure, and as T-5 dalgrams. Salected CTO data are displayed graphically.	WOOGS HOLE Oceanographic institution WOOLS HOLE Oceanographic institution WOOLS HOLE SAD SOCIATED CONTROLLED OBSERVATIONS, VOLUME KILV (LIGIS ADD SOCIATED CONTROLLED OBSERVATIONS, VOLUME KILV (LIGIS OCEAN REALWAY 1976) by Ann Spencer Rathern O'Verill and James R. Luyten. 46 pages. October 1980. Prepared for the Office of Maral Research under Contract NADOIL-76-C- 0197. NR 069-000 and You the National Scheck Foundation under Grants ATMY-02196, ATMY8-21891 and DES72-01984. Current and temperature measurements are presented from Instruments deployed during May of 1976 in the western Indian Current and temperature measurements are presented from Instruments of the HORE program. Sand SM. The experient was part of the HORE program. Sand SM. The experient was part of the HORE program. Sand SM. The experient was part of the HORE program. Faits. How of the ites. Two current meters and eleven temperature for the sites. Two current meters are presented in statis- tical tables and graphicially as scatter policy, progressive except once; scretcal ploiss and time series plois. Filtered Basic data from the current meters are presented in statis- tical tables and graphicially as scatter plois, progressive wetcor plois, scretcal plois and time series as as shown in composite displays. Selected TID data are displayed as plois of potential

